

Cyclo Aspirator

... Efficient trash & dockage removal with air

Manufactured in the U.S.A.

Standard Features

Free flowing of product—no need for feeders or gates

Gentle handling—no damage to pulses & beans

High capacities—models up to 10,000 bu. per hr.

Easy access — all components can be easily accessed through large door

No need for replacement — just reline or replace internal wear parts

Adjustable flow nozzle—for smaller and lighter seeds with lower capacities

Adjustable air flows & velocity—VFD on cyclor plate for various products & moisture controls



Some Uses:

...Remove cob, leaves & bees wings in corn

...Remove pods & hulls from beans

...Remove chaff & straws from wheat and barley

...Remove dust from rolled grains

...Remove trash from recycled plastics and other materials

Manufactured by:




P.O. Box 3167 ~ Great Falls, MT 59403

Distributed by:



2606 Lower River Rd
Great Falls, MT 59405
Phone ~ 406.240.0069
web site ~ www.mill-mac.com
email~MikeB@Mill-mac.com

Cyclo Aspirator Flow Diagram

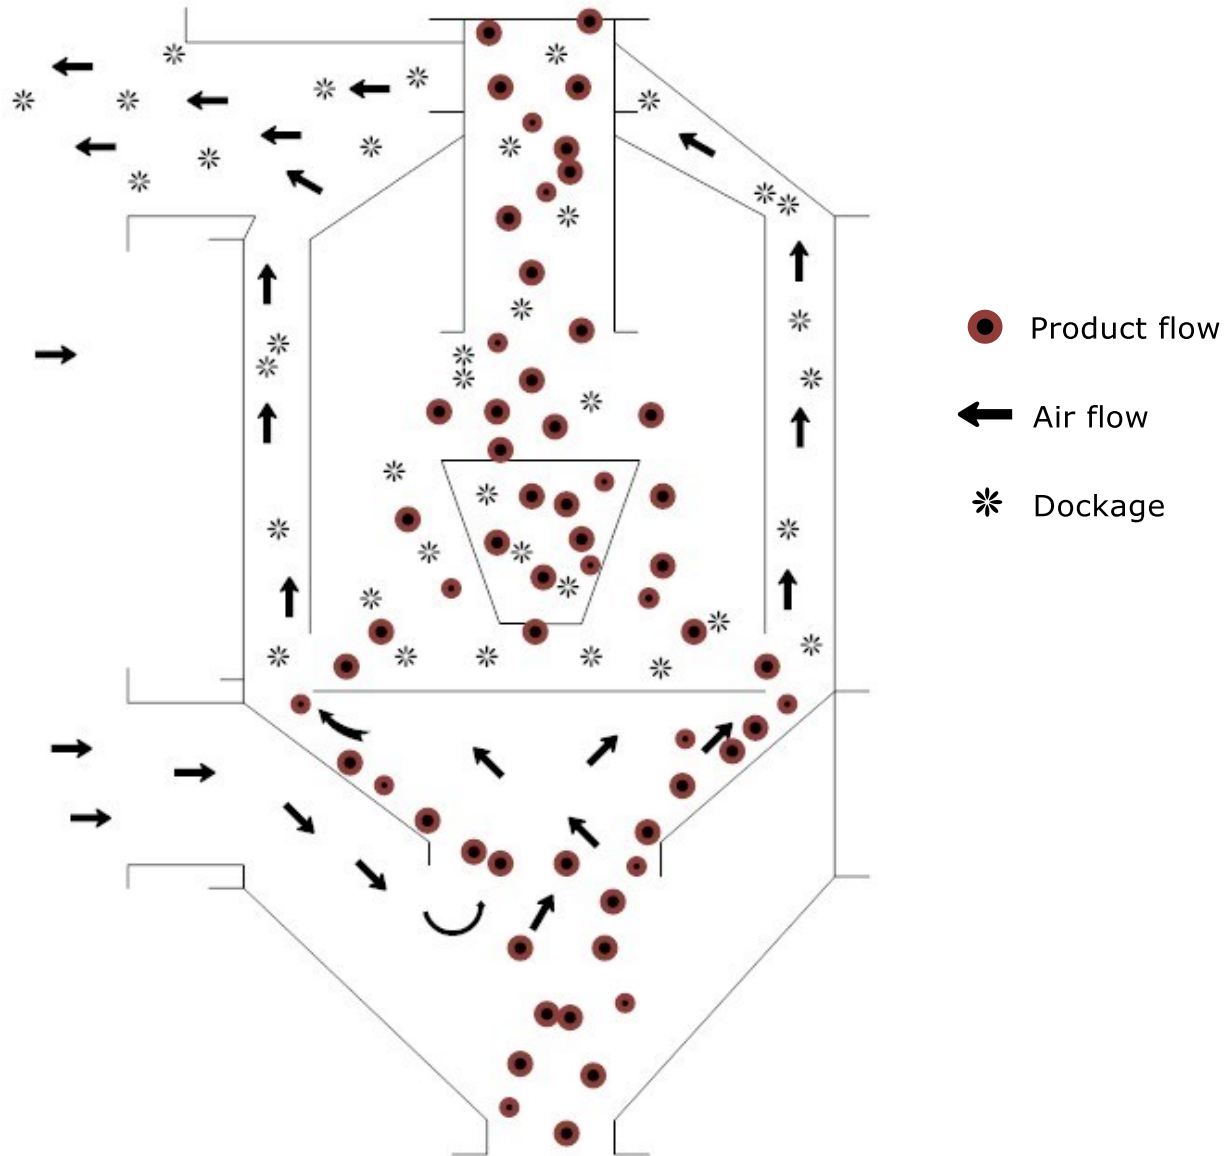

Model	81436	101848	122472
Height	88"	96"	132"
Depth	40"	52"	76"
Width	48"	60"	84"
Weight	850lb	1300lb	1800lb
Cyclinder HP	1/2HP	1HP	2HP
Fan HP	3-7.5	5-10	10-25
Capacity (bushels)	50-3000	100-8000	100-10,000
CFM	0-3000	0-12,000	0-20,000